


## 335PS

### Nylon cable chain with nylon cover openable to snap

#### Inner height (D) 35 mm

The chain has single link. Nylon cover is opened only on inner radius. Supplementary movable separators.



Separator	
- Unassembled	Part. no S4353
- Assembled	Part. no S4353MC

#### Technical characteristics when self-supported

Speed	10 m/s
acceleration	50 m/s <sup>2</sup>


For higher requirements please consult our technical dept.

A	B	C	D	R	Weight/m	Chain
mm	mm	mm	mm	mm	kg	Part Number
66,5	50	50	35	100-125-150-200	1,35	335PS050 □□□ *
92,5	50	76	35	100-125-150-200	1,57	335PS076 □□□ *
119,5	50	103	35	100-125-150-200	1,81	335PS103 □□□ *
166,5	50	150	35	100-125-150-200	2,21	335PS150 □□□ *

\*Complete the code by inserting the value of the radius (R): Ex. 335PS050 □ □ □ □

#### Self-Supporting Capacity Diagram

The maximum length of the self-supporting capacity ( $\frac{LS}{2}$ ) in relationship to the weight of the cables and hoses contained per linear metre.



#### End Brackets

The end brackets set allows the two ends of the chain to be attached to the equipment. Set complete with tiwrap clamps available on request.

#### Nylon Type





Fig. A  
The chain can be fixed frontally, inner or outer radius. (Fig A)

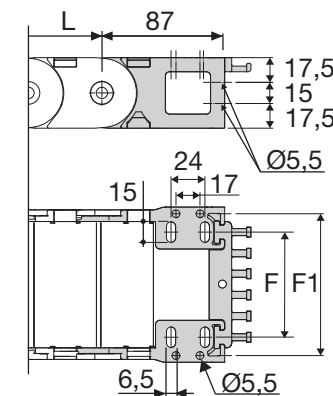

Chain type	F mm	F1 mm
335P..050	35	61
335P..076	61	87
335P..103	88	114
335P..150	135	161

#### Nylon Type Part Numbers

Complete Set Assembled	
Chain Type	End Brackets Set
335	AN335P□□□*KM□**

Complete Set Unassembled	
Chain Type	End Brackets Set
335	AN335P□□□*K

Tiwrap Clamp	
	Part Number
335	PFN335□□□*

\* Inner width (C)



\*\* 1=Pos.1; 2=Pos.2; 3=Pos.3

R	H	N	M	N1	M1
mm	mm	mm	mm	mm	mm
100	250	204	420	350	790
125	300	229	500	445	1025
150	350	254	580	540	1260
200	450	304	735	730	1725

Length of chain (L)

Half travel distance ( $\frac{LS}{2}$ ) plus length of curve (M) or (M1)

$$L = \frac{LS}{2} + M \text{ or } M1$$

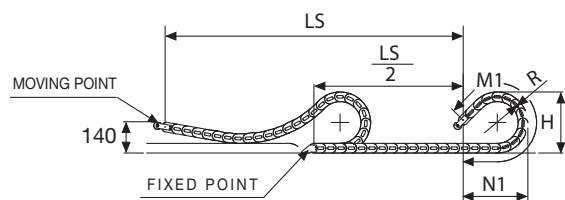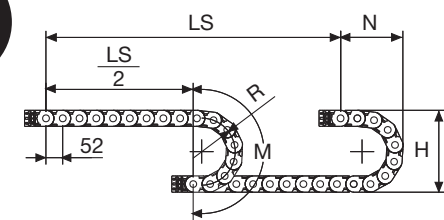

**SLIDING VERSION**  
to be ordered with pivoting end brackets set

For sliding applications, characteristics techniques may vary depending on the frequency, added weight and work environment.



## 335PS

Nylon cable chain with nylon cover openable to snap