


510TN-515TN Circular Nylon Cable Chain with opening frames

Inner height (D) 46 mm
Double share Sideband & Frame
construction with large anti-friction
twin-pin.
Frames opening from inner radius.




Pin 510TN	Part.no PG511
Pin 515TN	Part.no PG515-B515

Technical characteristics

Speed	180°/s
Acceleration	180°/s ²

For higher requirements please consult our
technical dept.

A	B	C	D	R	Weight/pitch	Chain
mm	mm	mm	mm	mm	kg	Part Number
132	55	88	46	125	0,200	510TN
132	55	88	46	175	0,200	515TN

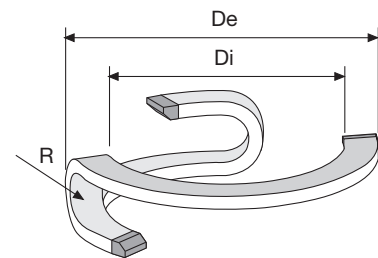

Chain	R	Di	De
Part Number	mm	mm	mm
510TN	125	940	1220
515TN	175	1060	1340

Length of Chain

Chain	Degrees	No
Part Numbers	of Rotation	of Pitches
510TN	90	13
510TN	180	17
510TN	270	22
510TN	360	27
515TN	90	17
515TN	180	23
515TN	270	29
515TN	360	35



515TN

510TN

Steel End Brackets

The end brackets set, containing two steel
plates screwed to the links, allows the two
ends of the chain to be attached to the
equipment. The end brackets are installed
in one position offering the possibility of
attaching the chain externally. (Fig. A)

Support Guide

For correct functioning of the chain it is
necessary that the installation is done in a
specific position.
For this reason Brevetti Stendalto has
observed and created a support guide which
can do this. (Fig. B)
For particular applications it is possible to
create support guides with attachment plates
and special dimensions.

510TN

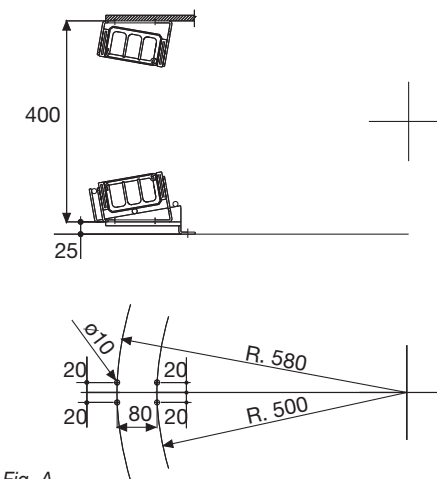


Fig. A

Fig. B

515TN

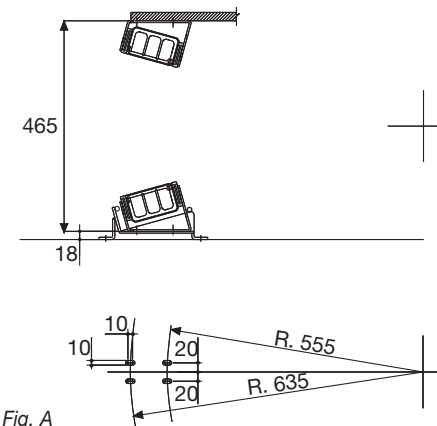


Fig. A

Fig. B

Steel End Brackets Part Numbers

Complete Set Assembled

Chain	End Brackets
Type	Set
510TN	A510TNKM
515TN	A515TNKM

Complete Set Unassembled

Chain	End Brackets
Type	Set
510TN	A510TNK
515TN	A515TNK

For applications with rotations exceeding
200° it is necessary to use the appropriate
accessories for supporting the cable chain.
(see page 29).